



DYNAMIC™ DOOR SERVICE










Sectional Door Opener **SD1000 Std**

The SD1000 Std has been engineered to the highest standard and utilises proven technology coupled with high quality features as standard to ensure reliable, safe and quiet operating performance year after year.







Door Types: Residential Sectional Doors **Door Size:** Up to 15m²

Key Benefits

-  **Quality Tested**
Proven technology coupled with robust design backed up by rigorous quality testing.
-  **5 Year Warranty**
5 year motor warranty (conditions apply).
-  **Motor**
Powerful DC motor which means reduced noise and vibration on opening and closing.
-  **Soft Start/Stop Function**
Ensures smooth and quiet operation, ideal when the garage is near bedrooms or living areas.
-  **LED Courtesy Light**
A convenient way to navigate through your garage environment and get in and out of your car (operates for 9 minutes).
-  **Transmitter Range**
Remote distance: Effective operating range of up to 100m. 433.92 MHz transmitter frequency.
-  **Maintenance Reminder**
This provides an audible reminder that the garage door is due for a service.
-  **F-linX Technology**
The F-linX app is the new intuitive app allowing you to control your door from anywhere in the world.
-  **Additional Safety Features**
Compatible with the wired PE Beams and wired E-Lock.

Standard Safety Features

-  **Auto Safety Reverse**
If an obstruction is detected while closing, the door will immediately stop and reverse upon contact with the obstruction. Reversing system complies with AS/NZS 60335-2-95.
-  **Auto Sensing Force**
During operation the force required is constantly monitored and adjusted to ensure economical operation and reduced wear and tear.
-  **Digital Limit System**
Equipped with digital limit system for ease of programming during installation.
-  **Manual Release**
In case of power failure you can simply activate the manual release to open your garage door.

dynamicds.com.au | 1300 645 056

SD1000 Std Sectional Door Opener

Kit Components




1 x Powerhead & Belt Rail (chain option available),
2 x Four Channel Transmitters, 1 x Wireless Wall Transmitter

Specifications


- Max garage door size: 15m²
- Max door weight up to 150kg
- Max peak pulling force: 1000N
- Rolling code technology
- 433.92 MHz transmitter frequency
- Soft start / soft close
- Adjustable operating speed
- Belt drive
- Easy set up & remote coding
- Maintenance alarm
- Reversing system complies with AS/NZS 60335-2-95

Door Opening and Closing Times (based on a 2.3m high door)




Rail Options

Maximum Door Height	Minimum Operator Clearance
2.4m	3.5m
3.5m	4.5m

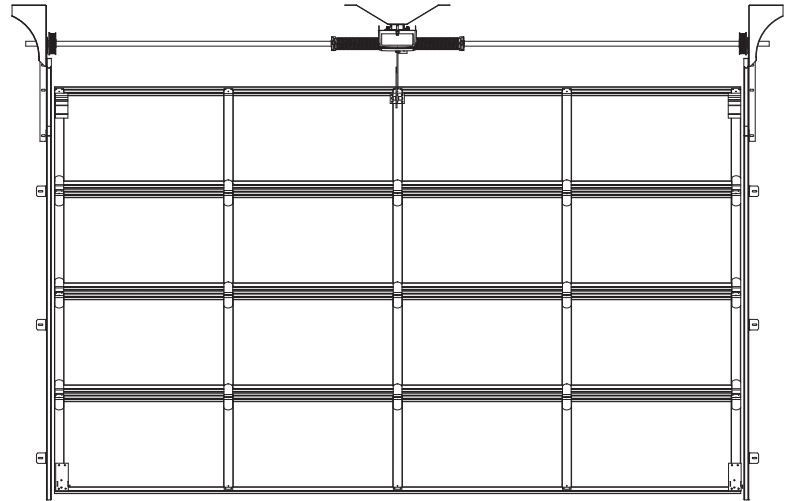

Max door height: 3.5m, Max door weight: 150kg, Max door area: 15m²

Typical Installation - Sectional Door

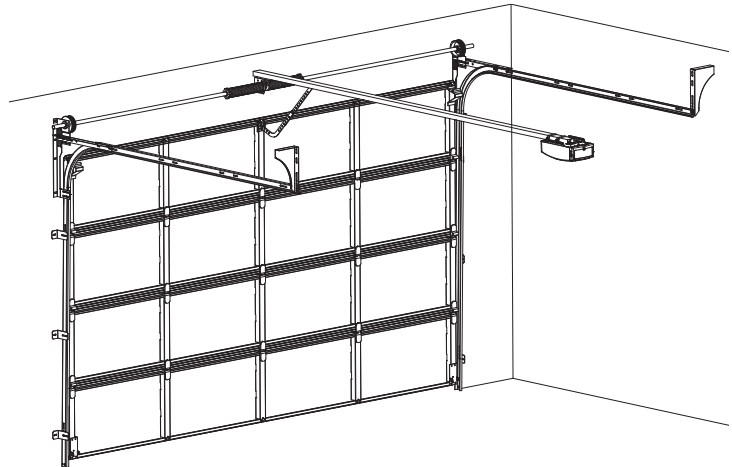

Optional Home Enhancers



E-Lock

The E-Lock enables remote control and status monitoring. When the door is completely closed, the E-Lock automatically locks.

Available as wired only.



F-linX Wi-Fi

Control your door from anywhere in the world. Simply connect your Wi-Fi, download the app on your phone and you can check the status of your door, check what percentage it is open and have full control of its operation.



Wireless Keypad

The Wireless Keypad can be programmed with multiple, unique user codes. It is perfect for the family, tradespeople, or even when going for a walk. This means you can leave your keys at home with peace of mind.



PE Beams

Allows the garage door to automatically reverse when its sensory light beam is broken by an obstruction, helping to protect your family from injury and your car from damage caused by contact.

Available as wired only.



Battery Backup

A Battery back provides an energy supply in the event of a power outage, allowing you to continue operating your garage door.